


軸用 同心型止め輪 (メートル)

軸受 (SAE規格品:メートル) 用

軸に加工した溝に嵌め込み

溝からはみ出ている部分が受けとして働き
部品を固定。

SB 同心型止め輪

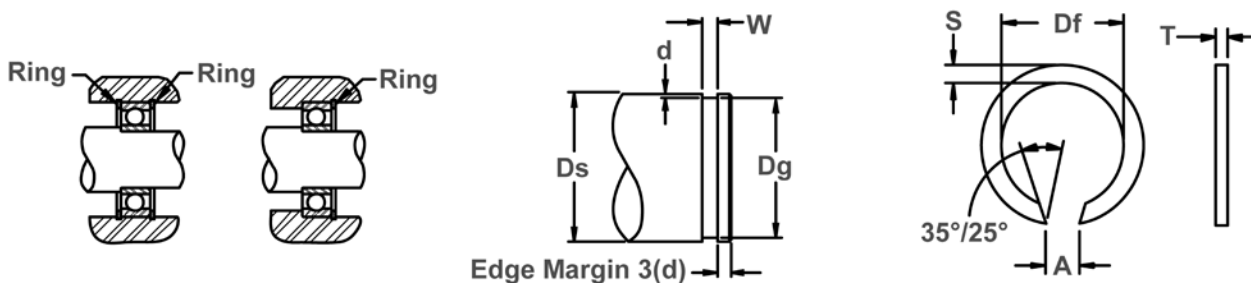

上図は、止め輪を使って軸受固定する典型的なアプリケーションの図。

軸径 & 溝寸法

自由径 & 止め輪寸法

止め輪 番号	軸径		軸受番号				溝寸法			止め輪寸法							
	Ds DEC	Ds mm					溝径		溝巾	深さ	自由径		板厚	板幅	自由間隙径		
			Dg	公差	W	d	Df	公差	T ±.002	S	A 最小	A 最大					
SB-12	.4724	12.00	201	301	--	.436	±.002	.046 +.003 -	.018	.421	+ .000 - .020	.042	.062 ±.003	.062	.187		
SB-15	.5906	15.00	202	302	--	.550		.053	.020	.538	+ .000	.047	.078	.078	.218		
SB-17	.6693	17.00	203	303	403	.629		+ .004 - .000	.020	.616	-.025	.047	±.003	.078	.218		
SB-20	.7874	20.00	204	304	404	.731	±.002	.068	.028	.710	+.000	.062	.093 ±.003	.078	.218		
SB-25	.9843	25.00	205	305	405	.924		+ .004 - .000	.030	.910		-.031	.062	.109 ±.003	.156	.312	
SB-30	1.1811	30.00	206	306	406	1.111		.085 +.004 -	.035	1.093			+.000	.075	.125 ±.005	.156	.312
SB-35	1.3780	35.00	207	307	407	1.288	.108	.045	1.265	-.046	.093			.156	.250	.406	
SB-40	1.5748	40.00	208	308	408	1.465	+ .005	.055	1.452		+.000	.093		±.005	.250	.406	
SB-45	1.7717	45.00	209	309	409	1.648	-.000	.062	1.625			-.062	.093	.188	.250	.468	
SB-50	1.9685	50.00	210	310	410	1.844	±.006	.062	1.820	+.000			.093	±.005	.250	.468	
SB-55	2.1654	55.00	211	311	411	2.015		.120	.075		1.995		-.078	.109	.218	.250	.468
SB-60	2.3622	60.00	212	312	412	2.212		+ .005 - .000	.075		2.187	+.000		.109	±.005	.250	.468
SB-65	2.5591	65.00	213	313	413	2.389	±.006	.085	2.359	+.000	.125			.250 ±.005	.250	.468	
SB-70	2.7559	70.00	214	314	414	2.586		.139	.085		2.556		-.062		.125	.250 ±.005	.250
SB-75	2.9528	75.00	215	315	415	2.783		+ .006	.085		2.750	+.000			.125		.250 ±.005
SB-80	3.1496	80.00	216	316	416	2.979	-.000	.085	2.946	+.000	.125			.250 ±.005	.250		
SB-85	3.3465	85.00	217	317	417	3.176	±.006	.085	3.139		+.000		.125		.250 ±.005	.250	
SB-90	3.5433	90.00	218	318	418	3.343		.100	.100			3.308	+.000			.125	.250 ±.005
SB-95	3.7402	95.00	219	319	419	3.540		.100	.100	3.500		+.000		.125		.250 ±.005	
SB-100	3.9370	100.0	220	320	420	3.737	.174	.100	3.697	+.000	.156			.312 ±.005	.312		
SB-105	4.1339	105.0	221	321	421	3.934	+ .008	.100	3.888		+.000		.156		.312 ±.005		.312
SB-110	4.3307	110.0	222	322	422	4.131	-.000	.100	4.080			-.093	.156			.312 ±.005	.312

単位: mm

硬さ: 全サイズ: HRC 42 ~ 52

その他の先端部形状をご希望の場合は、japan@rotorclip.comまでお問い合わせ下さい。

