


軸用強化版C型止め輪 (メートル)

軸用C型止め輪 (DSH) よりも板厚がより厚くタイプ。

そのため、より高いスラスト荷重に対応。

DSR 軸用偏心型止め輪 DIN 471 - 強化型

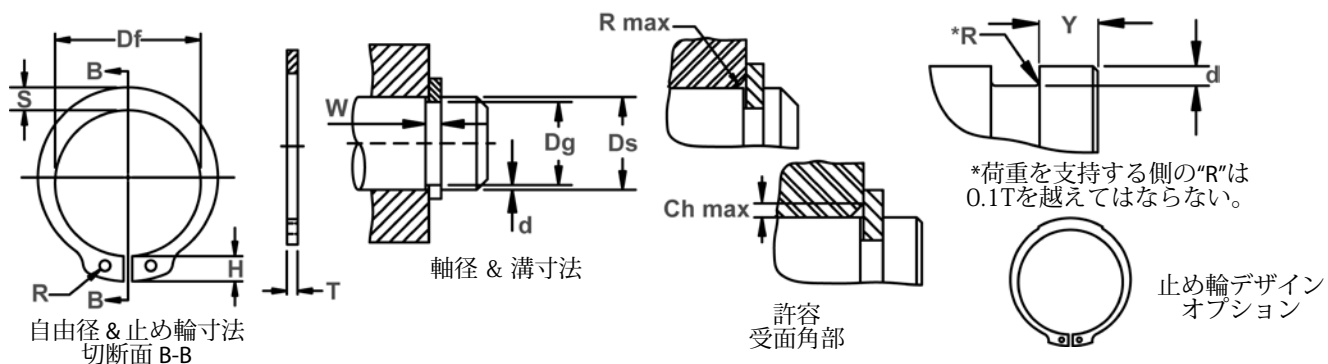

止め輪 番号	軸径 (mm)	溝寸法				止め輪寸法 & 重量							備考						
		溝径		溝巾	深さ	板厚 ***		自由径		ラグ 部 高さ	最大 板幅	取り 付け 穴径	重量	エッジ マー ジン	止め輪 スラ スト 荷重	溝 スラ スト 荷重	許容 受面 角部	最大 R/Ch. 最大 荷重	RPM 限界値
		Ds	Dg	公差	W 最小	d	T	公差	Df	公差	H 最大	S 参考	R 最小	kg/ 1000	Y 最小	Pr kN	Pg kN	R/Ch. 最大	P'r kN
DSR-12	12	11.5	-0.11	1.60	0.25	1.50	-0.06	11.0	+0.10	3.4	1.8	1.7	0.75	0.7	11.30	1.53	1.0	4.5	75000
DSR-15	15	14.3		1.60	0.35	1.50		13.8		4.8	2.4	2.0	1.20	0.7	15.50	3.20	1.0	4.5	50000
DSR-16	16	15.2		1.60	0.40	1.50		14.7		5.0	2.5	2.0	1.20	1.2	16.70	3.26	1.0	4.5	48000
DSR-17	17	16.2		1.60	0.40	1.50		15.7		5.0	2.6	2.0	1.24	1.2	18.00	4.32	1.0	4.5	46000
DSR-18	18	17.0	-0.13	1.60	0.50	1.50	16.5	-0.42	5.1	2.7	2.0	1.54	1.5	26.60	5.50	1.5	5.8	43000	
DSR-19	19	18.0		1.60	0.50	1.50	17.5		5.1	2.7	2.0	1.45	1.5	26.60	5.78	1.5	5.9	28000	
DSR-20	20	19.0		1.85	0.50	1.75	18.5		5.5	3.0	2.0	2.25	1.5	36.30	5.60	1.5	8.2	32000	
DSR-22	22	21.0		1.85	0.50	1.75	20.5		6.0	3.1	2.0	2.30	1.5	36.00	5.60	1.5	8.1	29000	
DSR-24	24	22.9	-0.21	1.85	0.55	1.75	22.2	-0.50	6.3	3.2	2.0	2.70	1.7	34.20	7.95	1.5	7.6	29000	
DSR-25	25	23.9		2.15	0.55	2.00	23.2		6.4	3.4	2.0	3.35	1.7	45.00	8.30	1.5	10.3	25000	
DSR-26	26	24.4		2.15	0.80	2.00	23.6		6.6	3.3	2.0	3.65	2.4	44.00	10.70	1.5	10.0	27000	
DSR-27	27	25.5		2.15	0.75	2.00	24.7		6.6	3.4	2.0	3.85	2.3	45.50	10.30	1.5	10.6	25000	
DSR-28	28	26.6	-0.25	2.15	0.70	2.00	25.9	-0.90	6.5	3.5	2.0	3.90	2.1	57.00	10.00	1.5	13.4	22000	
DSR-29	29	27.6		2.15	0.70	2.00	26.9		6.5	3.8	2.0	4.30	2.1	56.50	10.40	1.5	13.3	22000	
DSR-30	30	28.6		2.15	0.70	2.00	27.9		6.5	4.1	2.0	5.00	2.1	57.00	10.70	1.5	13.6	21000	
DSR-32	32	30.3		2.15	0.85	2.00	29.6		6.5	4.1	2.5	5.40	2.5	57.00	12.90	1.5	13.6	20000	
DSR-34	34	32.3	-0.39	2.65	0.85	2.50	31.5	-1.10	6.6	4.2	2.5	6.80	2.5	87.00	16.40	1.5	15.6	18000	
DSR-35	35	33.0		2.65	1.00	2.50	32.2		6.7	4.2	2.5	7.10	3.0	86.00	17.80	1.5	15.4	17000	
DSR-36	36	34.0		2.65	1.00	2.50	33.2		6.7	4.2	2.5	7.50	3.0	101.50	20.10	2.0	18.3	16000	
DSR-38	38	36.0		2.65	1.00	2.50	35.2		6.8	4.3	2.5	8.00	3.0	101.00	21.20	2.0	18.6	15000	
DSR-40	40	37.5	-0.10	2.65	1.25	2.50	36.5	+0.54	7.0	4.4	2.5	8.20	3.8	104.00	25.30	2.0	19.3	14000	
DSR-42	42	39.5		2.65	1.25	2.50	38.5		7.2	4.5	2.5	9.60	3.8	102.00	26.70	2.0	19.2	13000	
DSR-44	44	41.5		2.65	1.25	2.50	40.5		7.2	4.5	2.5	10.40	3.8	101.00	27.90	2.0	19.1	12000	
DSR-45	45	42.5		2.65	1.25	2.50	41.5		7.5	4.7	2.5	10.80	3.8	100.00	28.60	2.0	19.1	11000	
DSR-48	48	45.5	-0.35	2.65	1.25	2.50	44.5	-1.30	7.8	5.0	2.5	12.20	3.8	101.00	30.70	2.0	19.5	10000	
DSR-50	50	47.0		3.15	1.50	3.00	45.8		8.0	5.1	2.5	14.80	4.5	165.00	38.20	2.0	32.4	11000	
DSR-52	52	49.0		3.15	1.50	3.00	47.8		8.2	5.2	2.5	15.40	4.5	165.00	39.70	2.5	26.0	10000	
DSR-55	55	52.0		3.15	1.50	3.00	50.8		8.5	5.4	2.5	17.00	4.5	161.00	42.00	2.5	25.6	9000	
DSR-58	58	55.0	-0.08	3.15	1.50	3.00	53.8	+0.46	8.8	5.6	2.5	19.40	4.5	160.00	44.30	2.5	26.0	8000	
DSR-60	60	57.0		3.15	1.50	3.00	55.8		9.0	5.8	2.5	20.00	4.5	156.00	46.00	2.5	25.4	8000	
DSR-65	65	62.0		4.15	1.50	4.00	60.8		9.3	6.3	3.0	31.00	4.5	346.00	49.80	2.5	58.0	7000	
DSR-70	70	67.0		4.15	1.50	4.00	65.5		9.5	6.6	3.0	32.20	4.5	343.00	53.80	2.5	59.0	7000	
DSR-75	75	72.0	-0.10	4.15	1.50	4.00	70.5	-1.10	9.7	7.0	3.0	39.80	4.5	333.00	57.60	2.5	58.0	6000	
DSR-80	80	76.5		4.15	1.75	4.00	74.5		9.8	7.4	3.0	42.40	5.3	328.00	71.60	3.0	50.0	6000	
DSR-85	85	81.5		4.15	1.75	4.00	79.5		10.0	7.8	3.5	47.00	5.3	383.00	76.30	3.0	59.4	6000	
DSR-90	90	86.5		4.15	1.75	4.00	84.5		10.2	10.2	3.5	55.60	5.3	386.00	80.80	3.0	61.0	5000	
DSR-95	95	91.5	-0.35	4.15	1.75	4.00	89.5	-1.30	10.2	8.6	3.5	61.20	5.3	378.00	85.50	3.5	52.0	5000	
DSR-100	100	96.5		4.15	1.75	4.00	94.5		10.5	9.0	3.5	72.00	5.3	368.00	90.00	3.5	51.6	4000	

単位: mm

*** めっき加工を施した止め輪には0.05mmを表示の板厚に付け加えること。
ただし最大板厚は常に、表示溝巾よりも最低0.005mm薄い。

硬さ範囲: ステンレス鋼製止め輪 (DIN 1.4122 X39CrMo17)

止め輪 タイプ	サイズ 範囲	硬さ			
		HV	HRC	15N	30N
DSR	全サイズ	470~580	47~54	84~87.5	66~72

硬さ範囲: カーボン・スプリング・スチール製止め輪 (SAE 1060-1090)

止め輪タイプ	サイズ範囲	HV	HRC
		DSR	12~48
	50~100	435~530	44~51

